



RACK & REEL HOSE ▶

- 500 PSI Acceptance Minimum
- 250 PSI Service Test Minimum
- Totally Resistant to Rot or Mildew
- Competitively Priced
- All Hose 1½ Inches
- For Emergency Use Only
- Rack Hose Not Recommended for Wash-Down Use

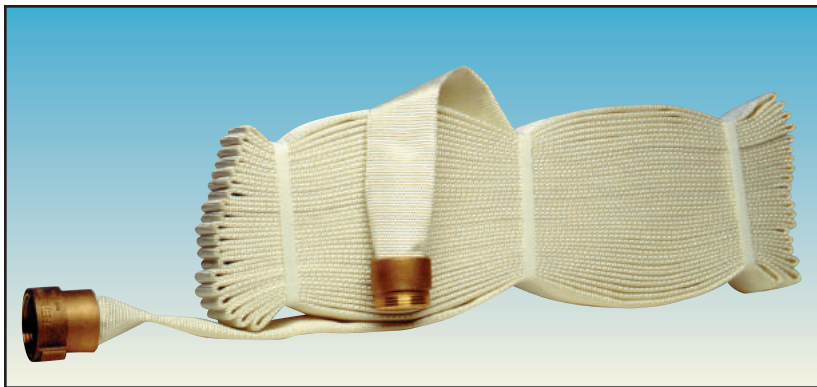


Part #	Description
50NST	50' Rack & Reel Hose, 15 Pins, Coupled (NST)
75NST	75' Rack & Reel Hose, 19 Pins, Coupled (NST)
100NST	100' Rack & Reel Hose, 24 Pins, Coupled (NST)
50NPSH	50' Rack & Reel Hose, 15 Pins, Coupled (NPSH)
75NPSH	75' Rack & Reel Hose, 19 Pins, Coupled (NPSH)
100NPSH	100' Rack & Reel Hose, 24 Pins, Coupled (NPSH)

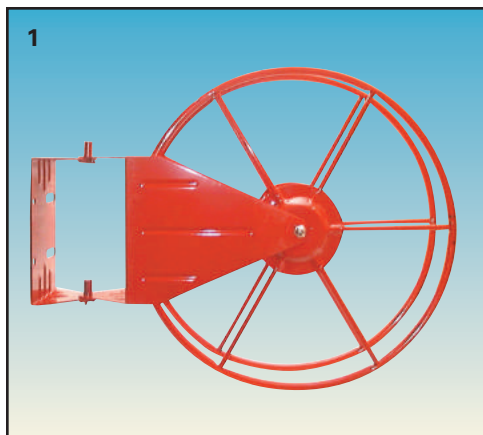

◀ HOSE RACK & REEL ▼

- Hose Reel and Rack Pivot 180° to Store Flush against the Wall
- Hose Rack UL, ULC Listed & FM Approved

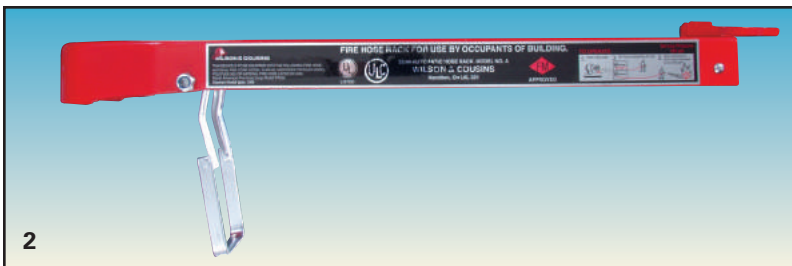

#	Part #	Description
1	3340	18" Hose Storage Reel
1	3350	24" Hose Storage Reel
2	3250	75' - 100' Hose Rack for 1½" Diameter Hose - 1½" Nipple Hole
2	3255	75' - 100' Hose Rack for 1½" Diameter Hose - 2½" Nipple Hole

◀ HOSE, RACK & REEL ACCESSORIES

#	Part #	Description
1	HH100	Tar at an Hose Hanger
2	FHWD	Wall Bracket for Hose Rack
3	BN15NST	1½" Brass Fog/Stream/Shutoff Nozzle (NST)
3	BN15NPSH	1½" Brass Fog/Stream/Shutoff Nozzle (NPSH)
4	PIN09	Pin for Hose Rack
5	370	1½" Rack Nipple (NST)
5	371	2½" Rack Nipple (NST)
5	372	1½" Rack Nipple (NPSH)
6	1575NST	1½" NST Stream/Fog, Shut Off Nozzle

