


▼ **SMOKE DETECTORS**



▼ **SMOKE DETECTORS**

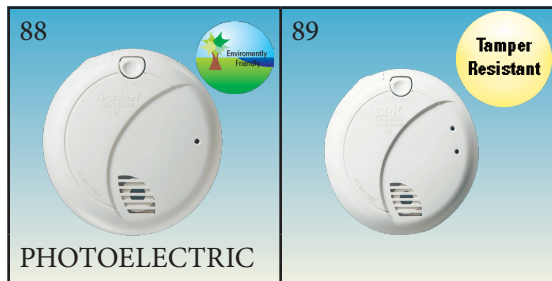

Part #	Description
83	9 V. w/ "Pause" Ion - "First Response" Branded
84	Battery Operated Smoke Detector (9V) Ionization
86	120V Hard wire Smoke Detector
87	120V Hard wire w/ Battery Back-up Smoke Detector
88	120V AC Photoelectric Smoke Alarm
89	10 Year Lithium "Tamper Resistant" Sealed Unit
90	Battery Operated Smoke Detector (9V) Photoelectric
91	120 V AC Smoke & CO Alarm
92	120 V AC/DC Smoke & CO Combo Alarm w/ Battery Back-up
93	Combination Battery Operated Smoke & CO Alarm

▼ **CO/SMOKE COMBINATION DETECTORS**



FEATURES OF MODELS	PRODUCT#	83	84	86	87	88	89	90	91	92	93
9 Volt Battery Back-up - EZ Access Battery Door.		X	✓	X	✓	✓	✓	X	X	✓	X
Battery Included		✓	✓	X	✓	✓	✓	✓	X	✓	✓
Low Battery Warning		✓	✓	X	✓	✓	✓	✓	X	✓	✓
Hard wired 120 volt AC		X	X	✓	✓	✓	✓	X	✓	✓	X
Perfect Mount - Easy Install & Alignment		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Alarm Latch - Remembers & Identifies Initiating Alarms		X	X	✓	✓	X	✓	X	✓	✓	X
Low Battery Latch: Identifies affected unit		X	X	X	✓	X	✓	X	X	✓	✓
Single Button Test - Silence Feature		✓	✓	✓	✓	✓	✓	✓	✓	✓	X
Silence Low Battery Chirp for up to 8 Hours		X	X	✓	✓	X	✓	X	X	✓	X
Intelligent Sensing Tech. - Reduces Nuisance Alarm Possibility		X	X	✓	✓	✓	X	X	✓	✓	X
Advanced Electrochemical CO Sensor		X	X	X	X	X	X	X	✓	✓	✓
End Of Life Signal (CO)		X	X	X	X	X	X	X	✓	✓	X

IONIZATION SMOKE ALARMS respond earlier to fast flaming fires, ones that devour combustibles extremely fast, spread rapidly, and generate considerable heat with little smoke.

PHOTO ELECTRIC SMOKE ALARMS respond earlier to smoldering slow fires that generate large amounts of thick, black smoke with little heat, and may smolder for hours before bursting into flames.



Charge It!




Phone: 1-905-791-3102 • Fax: 1-905-791-2191
1-800-268-0146 1-800-565-3526

CO Detectors & CO/Smoke Combo



▼ CARBON MONOXIDE DETECTORS

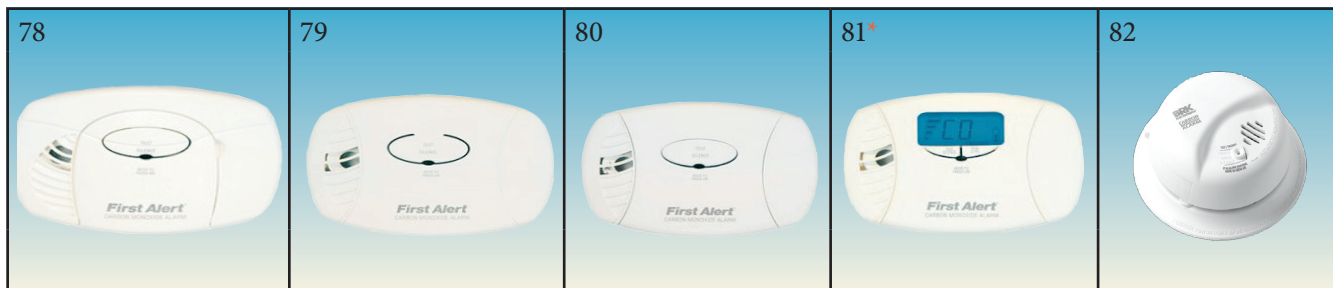

▼ CO/SMOKE COMBINATION DETECTORS



Part #	Description
78	Battery Powered CO Detector
79	Plug In CO Detector
80	Plug In CO Detector w/ Battery Back-up
81*	Digital Display Plug-in CO Detector w/ Battery Back-up
82	120 V Hard wire CO Alarm w/ Battery Back-up
91	120 V AC Smoke & CO Combo Alarm
92	120 V AC/DC Smoke & CO Combo Alarm w/ Battery Back-up
93	Combination Battery Operated Smoke & CO Alarm

*Remote mute silences any nuisance alarms by pressing any bl standard household remote control.

**TOP
QUALITY!
DOG**

FEATURES OF MODELS	PRODUCT#	78	79	80	81	82	91	92	93
Alarm Mute Button		✓	✓	✓	✓	✓	✓	✓	✓
EZ Access Battery Door		✓	X	✓	✓	✓	X	✓	X
Low Battery Indicator		✓	X	✓	✓	✓	X	✓	✓
Battery Included		✓	X	✓	✓	✓	X	✓	✓
Electrochemical Sensor		✓	✓	✓	✓	✓	✓	✓	✓
Hard wire 120 Volt AC		X	X	X	X	✓	✓	✓	X
Plug-in 120 Volt AC		X	✓	✓	✓	X	X	✓	X
End of Detector Life Timer		X	X	✓	✓	✓	✓	✓	✓
Loud 85 db. Alarm Pattern		✓	✓	✓	✓	✓	✓	✓	✓
Interconnecting Up to 18 Units (Smoke and Combination Units Combined)		X	X	X	X	✓	✓	✓	X
Alarm Source Indicator Feature		X	X	X	X	✓	✓	✓	✓



Part #	Description
94	Photoelectric Smoke Alarm for the Hearing Impaired



Part #	Description
85	Escape Light Smoke Alarm

▲ SMOKE ALARM WITH ESCAPE LIGHT

- Battery Operated w/ Escape Light & Test/Silence Button
- EZ Battery Door
- Ionization Type



Part #	Description
DUST	Smoke Detector Cleaner

◀ STROBE LIGHT FOR THE HEARING- IMPAIRED

- 120 Volt Hard wire "Photoelectric"
- A Super Bright 177 Candela Xenon Strobe Flashes When the Alarm Sounds to Help Alert Impaired Residents
- Meets ADA Requirements for Hearing Impaired
- Ionization Sensing Technology/ Most Sensitive to Fast Flaming Fires
- Alarm Source Indicator
- Alarm/Power Test Feature
- Operating LED
- Interconnecting Up to 18 Units - 12 Smoke Alarms and 6 Compatible Devices Combined (Heat Alarms, Bells, Repeaters or Switches)
- 10 Year Manufactures Warranty

EXPLOSIVE GAS & CARBON DIOXIDE ALARM ▶

- 3 -in-1 Detection of Combustible Gas & Loud 85dB Alarm
- EZ View Backlit Digital Display
- Plug-in w/ Battery Back-up w/ EZ Battery Door 9 V. Battery Incl.



Part #	Description
95	CO/Methane/Propane Gas Detector

- Detector Has Remote Controlled Mute
- Alarm & Low Battery Mute Button

- Electrochemical Multi Gas Sensor & End of Life Timer
- 5 Year Limited Manufactures Warranty

▶ CANNED TEST SMOKE

- Simulates Full Range of Actual Fire Conditions
- Quick & Easy to Use
- Tests Both Photoelectric and Ionization Detectors
- Over 100 Tests per Can

◀ SMOKE DETECTOR CLEANER

- Cleans Detectors On Site
- Ozone Friendly
- Removes Dust, Lint and Other Foreign Matter



Part #	Description
SMOKE	Canned Test Smoke

One Link Smoke, CO & Combination Alarms



▼ WIRELESS BATTERY SMOKE ALARM

▼ WIRELESS BATTERY CO ALARM

▼ WIRELESS BATTERY COMBINATION SMOKE & CO ALARM



ONE LINK FEATURES



- **FR Interconnect:** Reliable and Secure Radio Frequency Communication Between Communication Between Alarms. 915 MHz Frequency w/6500 Security Codes & 3 Channel Frequency Hopping
- **PHOTOELECTRIC TECHNOLOGY:** Helps Reduce Nuisance Alarms, Especially Around Kitchens & Baths Which Are More Prone to Nuisance Alarms From Cooking Smoke & Shower Steam'
- **EZ Access Battery Door:** No Need To Remove The Alarm From The Ceiling to Change The Battery
- **Perfect Mount:** Mounting Brackets Keeps Alarm Secure Over a Wide Rotation Range to Allow for Perfect Alignment.
- **DUST COVER:** Keeps Alarm Clean During Construction
- **Optipath 360 Technology™:** Patented Technology Provides 360 Degrees of Direct Access to Smoke Sensor.
- **Spread Spectrum Horn Tone:** Lower & Varying Horn Frequency Makes it Easier for Elderly w/ Normal Age Related Hearing Loss to Hear Horn. Sweeps Through the 2200-3400 Hz Range
- **Test/Silence Button:** Tests Alarm Functions & Battery. Silences Unwanted Alarms. Two Silence Features - Temporarily Silence Low Battery Chirp for Up to 8 Hours Before Replacing Battery or Silence Unwanted Alarm for Several Minutes
- **Latching Feature Alarm Latch:** Easily Identifies Initiating Alarm Even After Alarm Condition Has Subsided. Low Batter Latch: Identifies Which Unit is in Low Battery Condition. Both Features Activate for Up to 15 Minutes

Part #	Description
96	Battery Photo Smoke w/ Silence - Wireless Interconnect
97	Battery CO Alarm w/ Silence - Wireless Interconnect
98	Battery Combination CO / Photo Smoke w/ Silence - Interconnect

RESIDENTIAL PLACEMENT GUIDE

FOR AC 120 VOLT INTERCONNECTED BRK & FIRST ALERT PRODUCTS

Agency Recommendations: NFPA 72 Recommends a Smoke Alarm in Every Bedroom, Outside Each Sleeping Area in the Immediate Vicinity of the Bedrooms and On Every Level, Including Basements and Excluding Crawl Spaces and Unfinished Attics. NFPA 720 Recommends CO Alarms Outside of Every Sleeping Area.

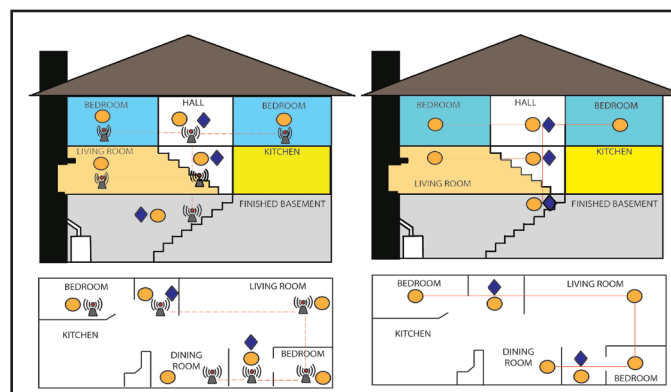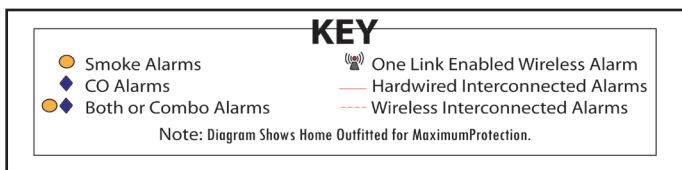

Charge It!



Phone: **1-905-791-3102** • Fax: **1-905-791-2191**
1-800-268-0146 **1-800-565-3526**

28